


BREMSLEITUNGSKUPPLUNG

PN 150 · ISO 5676

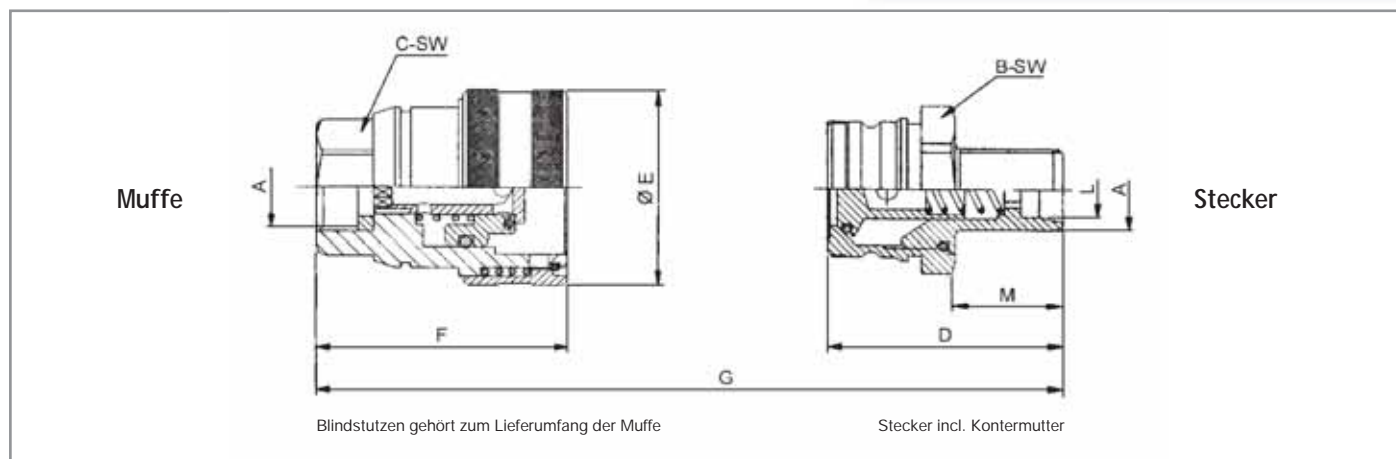

Innengewinde DIN 3852 · Muffe wird immer mit Blindstutzen geliefert.

DN	max. Betr.druck gekuppelt (bar)	A Gewinde	L	M	B SW	C SW	D	E \varnothing	F	G	Bestell-Nr. Muffe
10	150	G 3/8" BSP				27		45	55	90	7149
10	150	G 1/2" BSP				27		45	55	90	7149 A
10	150	M 18 x 1,5				27		45	55	90	7150
											Bestell-Nr. Stecker
10	150	M 18 x 1,5	12	23	32		51			90	7151
10	150	M 22 x 1,5	15	23	32		51			90	7152

