


BREMSLEITUNGSKUPPLUNG

PN 150 · ISO 5676

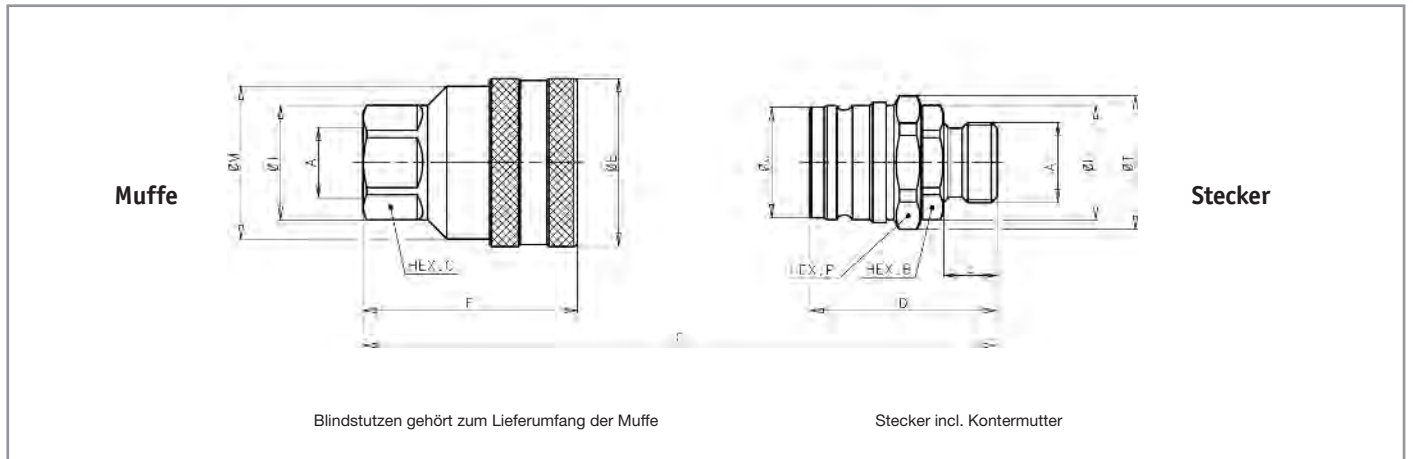

Innengewinde DIN 3852 · Muffe wird immer mit Blindstutzen geliefert.

DN	max. Betr.druck gekuppelt (bar)	A Gewinde	L	HEX P	HEX C	D	E Ø	F	G	Bestell-Nr. Muffe
10	150	G 3/8" BSP	-	-	27	-	44	56,2	39,3	7149
10	150	G 1/2" BSP	-	-	27	-	44	59,2	102,3	7149 A
10	150	M 18 x 1,5	-	-	27	-	44	54,2	97,3	7150
										Bestell-Nr. Stecker
10	150	M 18 x 1,5	23	32	-	58,1	-	-	-	7151 K
10	150	M 22 x 1,5	23	32	-	58,1	-	-	-	7152

